SANDWICH REGULATORS FOR ISO 5599/1 BASES

TECHNICAL DATA	ISO 1	ISO 2
Max upstream pressure	13 bar	
Pressure range	0÷12 bar	
Pressure gauge range	0÷12 bar	
Flow rate at 6 Bar ΔP 1 Bar	400 Nl/min	550 Nl/min
Operating temperature range	–10÷+60°C	
Fixing screw on ISO 5599/1 base	M5 ant-extraction	M6 anti-extraction
Installation	in any position	
Instructions for use	Downstream pressure must always be set to increasing values	

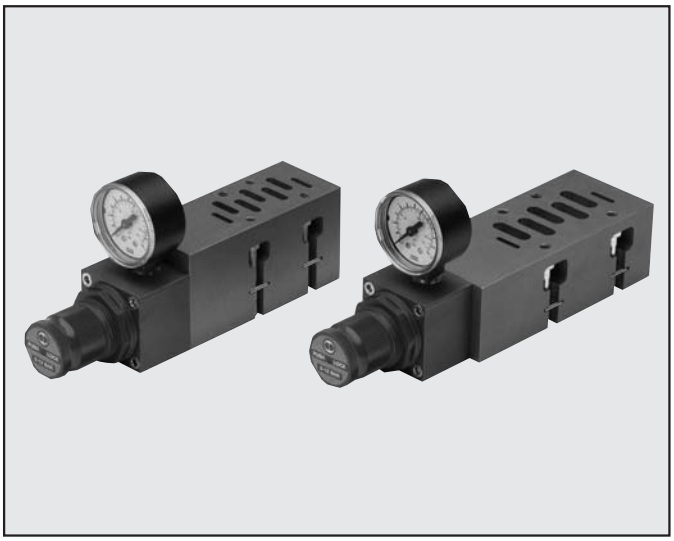

SANDWICH REGULATOR FOR ISO 1 VALVES

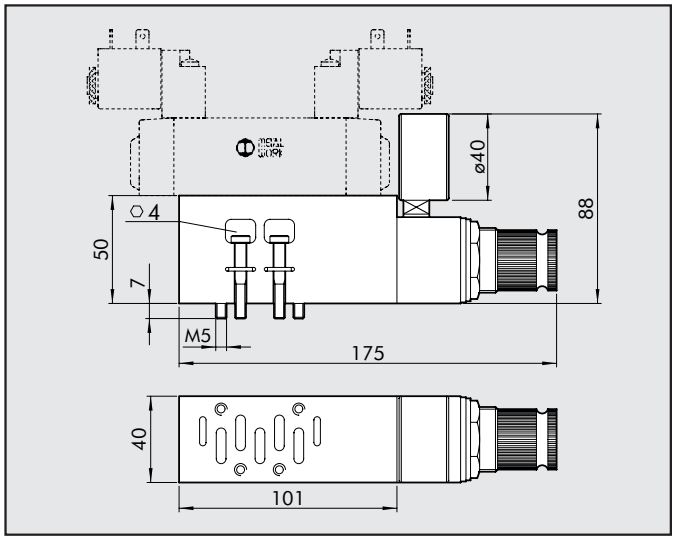

Symbol	Abbrev.	Code	Weight [g]
	0228000804	Sandwich regulator 1 0÷12 bar ISO 1	760
	0228000814*	Sandwich regulator 3 0÷12 bar ISO 1	760

*A pilot-assisted valve needs to be used since port 1 relieves pressure, it is not under pressure

SANDWICH REGULATOR FOR ISO 2 VALVES

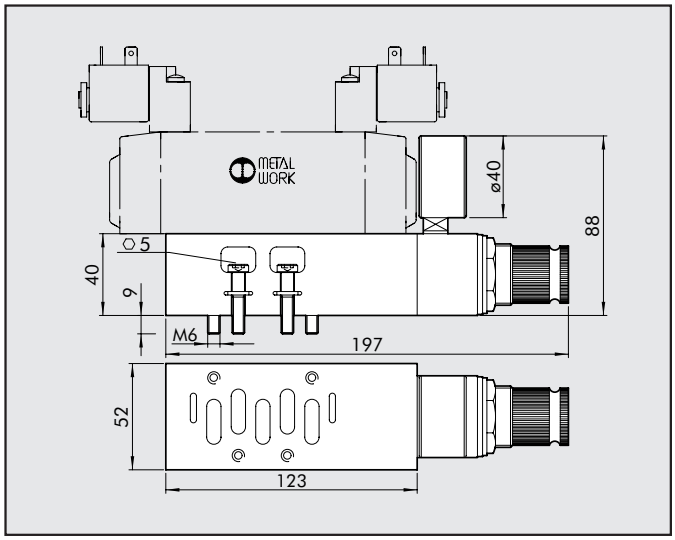

Symbol	Code	Description	Weight [g]
	0228001804	Sandwich regulator 1 0÷12 bar ISO 2	900
	0228001814*	Sandwich regulator 3 0÷12 bar ISO 2	900

*A pilot-assisted valve needs to be used since port 1 relieves pressure, it is not under pressure